


# Ashton Coal

Monthly attended noise monitoring  
March 2019

---

Prepared for Ashton Coal Operations Pty Ltd  
March 2019

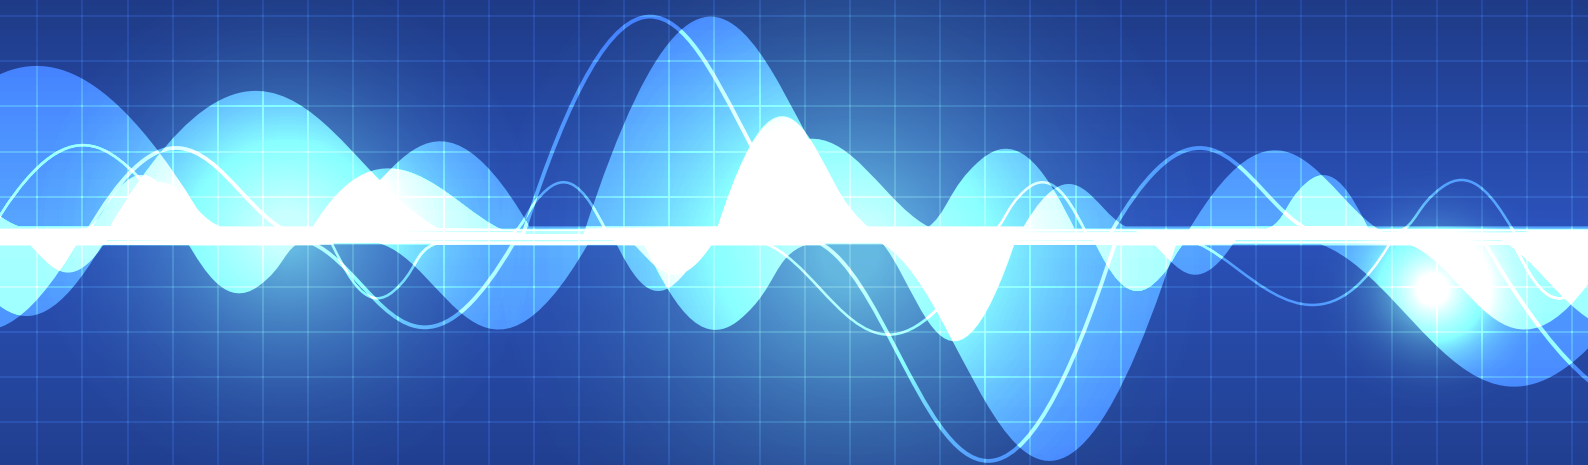



# Servicing projects throughout Australia and internationally

## SYDNEY

Ground floor, 20 Chandos Street  
St Leonards NSW 2065  
T 02 9493 9500

## NEWCASTLE

Level 1, 146 Hunter Street  
Newcastle NSW 2300  
T 02 4907 4800

## BRISBANE

Level 10, 87 Wickham Terrace  
Spring Hill QLD 4000  
T 07 3648 1200

## ADELAIDE

Level 1, 70 Pirie Street  
Adelaide SA 5000  
T 08 8232 2253

## MELBOURNE

187 Coventry Street  
South Melbourne VIC 3205

## PERTH

PO Box 8155  
Fremantle WA 6160

## CANBERRA

PO Box 9148  
Deakin ACT 2600

# Ashton Coal

Monthly attended noise monitoring - March 2019

Prepared for Ashton Coal Operations Pty Ltd  
March 2019

---

EMM Newcastle  
Level 1, Suite 6, 146 Hunter Street  
Newcastle NSW 2300

T 02 4907 4800

F 02 4907 4899

E [info@emmconsulting.com.au](mailto:info@emmconsulting.com.au)

# Ashton Coal

## Monthly attended noise monitoring - March 2019

### Report Number

---

H190081 RP3

### Client

---

Ashton Coal Operations Pty Ltd

### Date

---

22 March 2019

### Version

---

v1-0 Final

### Prepared by

---



**Lucas Adamson**  
Acoustic Consultant  
22 March 2019

### Approved by

---



**Najah Ishac**  
Director  
22 March 2019

This report has been prepared in accordance with the brief provided by the client and has relied upon the information collected at the time and under the conditions specified in the report. All findings, conclusions or recommendations contained in the report are based on the aforementioned circumstances. The report is for the use of the client and no responsibility will be taken for its use by other parties. The client may, at its discretion, use the report to inform regulators and the public.

© Reproduction of this report for educational or other non-commercial purposes is authorised without prior written permission from EMM provided the source is fully acknowledged. Reproduction of this report for resale or other commercial purposes is prohibited without EMM's prior written permission.

# Table of Contents

1	Introduction	1
2	Glossary of acoustic terms	2
3	Noise limits	4
3.1	Operational and sleep disturbance noise limits	4
3.2	Cumulative noise criteria	4
3.3	Low frequency noise criteria	5
4	Assessment methodology	7
4.1	Attended noise monitoring	7
4.2	Instrumentation	7
4.3	Attended noise monitoring exceedance procedure	9
4.4	Determination of stability category	9
5	Review of data and discussion	11
5.1	Summary	11
5.2	N2 - Camberwell Village (west)	13
5.3	N3 - Camberwell Village (north east)	13
5.4	N4 - South of New England Highway	13
6	Conclusion	14
	References	15
<b>Appendices</b>		
Appendix A	Project approval extract	A.1
Appendix B	EPL extract	B.1
Appendix C	Calibration certificates	C.1
<b>Tables</b>		
Table 2.1	Glossary of acoustic terms	2
Table 2.2	Perceived change in noise	3
Table 3.1	Noise impact assessment criteria	4
Table 3.2	One-third octave low-frequency noise thresholds	5
Table 4.1	Attended noise monitoring locations	7

Table 4.2	Stability categories and temperature lapse rates	10
Table 5.1	Ashton Coal attended noise monitoring results – March 2019	12

### Figures

Figure 2.1	Common noise levels	3
Figure 4.1	Noise monitoring locations and Ashton colliery boundary	8

# 1 Introduction

EMM Consulting Pty Limited (EMM) was engaged to complete monthly attended noise surveys on behalf of Ashton Coal Operations Pty Ltd (Ashton Coal).

The purpose of the monitoring was to address requirements of the approved Ashton Coal Noise Management Plan (NMP), prepared to satisfy the requirements of the Development Consent DA 309-11-2001-I (DC) and Environment Protection License (EPL) 11879.

This report presents the results and findings of attended noise monitoring conducted on 14 March 2019.

The following material was referenced as part of this assessment:

- Department of Planning and Environment (DPE), Development Consent 309-11-2001-I, as modified on 20 June 2016 (current as of 22 March 2019);
- Environment Protection Authority (EPA), Environment Protection License 11879, as varied on 17 August 2017 (current as of 22 March 2019);
- Ashton Coal Project Noise Management Plan (NMP), approved by DPE on 10 October 2017;
- NSW EPA, Industrial Noise Policy (INP), 2000;
- NSW EPA, Industrial Noise Policy Application notes, 2017; and
- NSW EPA, Noise Policy for Industry (NPfI), 2017.

## 2 Glossary of acoustic terms

Several technical terms are discussed in this report. These are explained in Table 2.1.

**Table 2.1** Glossary of acoustic terms


Term	Description
dB	Noise is measured in units called decibels (dB). There are several scales for describing noise, the most common being the 'A-weighted' scale. This attempts to closely approximate the frequency response of the human ear.
L <sub>A1</sub>	The 'A-weighted' noise level which is exceeded 1% of the time.
L <sub>A1,1 minute</sub>	The 'A-weighted' noise level exceeded for 1% of the specified time period of 1 minute.
L <sub>A10</sub>	The 'A-weighted' noise level which is exceeded 10% of the time. It is approximately equivalent to the average of maximum noise level.
L <sub>A90</sub>	Commonly referred to as the background noise level. The 'A-weighted' noise level exceeded 90% of the time.
L <sub>Aeq</sub>	The energy average noise from a source. This is the equivalent continuous 'A-weighted' sound pressure level over a given period. The L <sub>Aeq,15 minute</sub> descriptor refers to an L <sub>Aeq</sub> noise level measured over a 15-minute period.
L <sub>Amin</sub>	The minimum 'A-weighted' noise level received during a measuring interval.
L <sub>Amax</sub>	The maximum root mean squared 'A-weighted' sound pressure level (or maximum noise level) received during a measuring interval.
L <sub>Ceq</sub>	The equivalent continuous 'C-weighted' sound pressure level over a given period. The L <sub>Ceq,15 minute</sub> descriptor refers to an L <sub>Ceq</sub> noise level measured over a 15 minute period. C-weighting can be used to measure low frequency noise.
Day period	Monday – Saturday: 7 am to 6 pm, on Sundays and Public Holidays: 8 am to 6 pm.
Evening period	Monday – Saturday: 6 pm to 10 pm, on Sundays and Public Holidays: 6 pm to 10 pm.
Night period	Monday – Saturday: 10 pm to 7 am, on Sundays and Public Holidays: 10 pm to 8 am.
Temperature inversion	A meteorological condition where the atmospheric temperature increases with altitude.

It is useful to have an appreciation of decibels (dB), the unit of noise measurement. Table 2.2 gives an indication as to what an average person perceives about changes in noise levels. Examples of common noise levels are provided in Figure 2.1.



**Table 2.2 Perceived change in noise**

Change in sound pressure level (dB)	Perceived change in noise in surrounding environment
up to 2	not perceptible
3	just perceptible
5	noticeable difference
10	twice (or half) as loud
15	large change
20	four times (or quarter) as loud

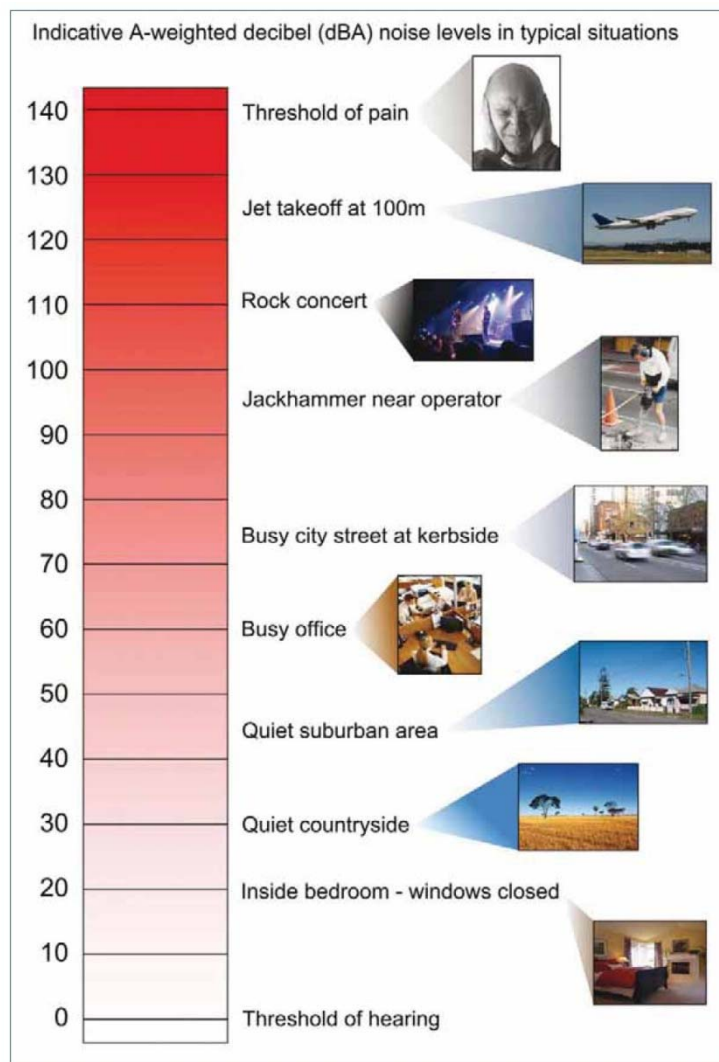

Source: Road Noise Policy (Department of Environment, Climate Change and Water 2011)

**Figure 2.1 Common noise levels**

# 3 Noise limits

## 3.1 Operational and sleep disturbance noise limits

Ashton Coal noise limits are provided in Table 1, Condition 2 of Appendix 6 of the DC and Condition L2.1 of the EPL. Extracts of the relevant sections of the DC and EPL pertaining to noise are provided in Appendix A and B, respectively. The approved NMP adopts three attended noise monitoring locations that are representative of residences outlined in the DC. The noise monitoring locations and relevant criteria are summarised in Table 3.1.

**Table 3.1 Noise impact assessment criteria**

Monitoring location	Day	Evening	Night	Night
	L <sub>Aeq,15 minute</sub> , dB	L <sub>Aeq,15 minute</sub> , dB	L <sub>Aeq,15 minute</sub> , dB	L <sub>A1,1 minute</sub> , dB
N2	38	38	36	46
N3	38	38	36	46
N4	38	38	36	46

The DC specifies the following meteorological conditions under which noise limits do not apply which are also consistent with those provided in the EPL:

- during periods of rain or hail;
- average wind speed at microphone height exceeds 5 m/s;
- wind speeds greater than 3 m/s at 10 metres above ground level; and
- temperature inversion conditions greater than 3°C/100m.

For this assessment, the recorded L<sub>Amax</sub> has been used as a conservative estimate of the L<sub>A1,1 minute</sub>. The INP application notes state that the EPA accepts sleep disturbance analysis based on either the L<sub>A1,1 minute</sub> or L<sub>Amax</sub> metrics (EPA 2013), with use of L<sub>Amax</sub> resulting in a more conservative assessment.

The DC and EPL state that modification factor corrections in the application notes to the INP (2017) shall be applied to the measured mine noise levels where applicable. The application notes to the INP state that Fact Sheet C of the NPfI (EPA 2017) now applies regarding the application of modifying factors.

## 3.2 Cumulative noise criteria

Ashton Coal cumulative noise limits are provided in Condition 5 and Condition 6 of Schedule 3 of the DC. An extract of the conditions relevant to cumulative noise criteria is provided here.

5. The Applicant must implement all reasonable and feasible measures to ensure that the noise generated by the Ashton Mine Complex combined with the noise generated by other mines in the vicinity does not exceed the criteria in Table 4 at any residence on any privately-owned land or on more than 25 per cent of any privately-owned land (except for the noise affected residential receivers in Table 1).

Table 4: Cumulative Noise Criteria dB(A) L<sub>Aeq</sub> (period)

Location	Day	Evening	Night
Camberwell Village	55	45	40
All other privately-owned land	50	45	40

Cumulative noise is to be measured in accordance with the relevant requirements of the NSW Industrial Noise Policy. Appendix 8 sets out the requirements for evaluating compliance with these criteria.

6. If the cumulative noise generated by the Ashton Mine Complex combined with the noise generated by other coal mines in the vicinity exceeds the criteria in Table 5 at any residence on privately-owned land or more than 25 per cent of any privately-owned land (except for the noise-affected residential receivers in Table 1), then upon receiving a written request from the landowner, the Applicant must, together with the relevant mines, acquire the land on as equitable basis as possible, in accordance with the procedures in conditions 7 and 8 of schedule 4.

Table 5: Cumulative Noise Acquisition Criteria dB(A)  $L_{Aeq}$  (period)

Location	Day	Evening	Night
Camberwell Village	60	50	45
All other privately-owned land	55	50	45

Cumulative noise is to be measured in accordance with the relevant requirements of the NSW Industrial Noise Policy. Appendix 8 sets out the requirements for evaluating compliance with these criteria.

### 3.3 Low frequency noise criteria

Condition 3 of Appendix 8 of the DC and L2.3 of the EPL state that noise generated by Ashton Coal is to be measured in accordance with the relevant requirements of the INP. The INP application notes state that Section 4 of the INP has been withdrawn and the modifying factor adjustments outlined in Fact Sheet C of the NPfl are to be used when assessing the characteristics of a noise source.

Fact sheet C of the NPfl (EPA 2017) provides guidelines for applying modifying factor corrections to account for low frequency noise emissions. The NPfl specifies that a difference of 15 dB or more between site 'C-weighted' and site 'A-weighted' noise emission levels identifies the potential for an unbalanced spectrum and potential increased annoyance.

Where a difference of 15 dB or more between site 'C-weighted' and site 'A-weighted' noise emission levels is identified, the one-third octave noise levels recorded should be compared to the values in Table C2 of the NPfl (EPA 2017), which has been reproduced in Table 3.2 below.

Table 3.2 One-third octave low-frequency noise thresholds

One-third octave $L_{Zeq,15\text{ minute}}$ threshold level													
Frequency (Hz)	10	12.5	16	20	25	31.5	40	50	63	80	100	125	160
dB (Z)	92	89	86	77	69	61	54	50	50	48	48	46	44

The following modifying factor correction is to be applied where the site 'C-weighted' and site 'A-weighted' noise emission level is 15 dB or more and:

- where any of the one-third octave noise levels in Table 3.2 are exceeded by up to and including 5 dB and cannot be mitigated, a 2 dB positive adjustment to measured/predicted A-weighted levels applies for the evening/night period; or
- where any of the one-third octave noise levels in Table 3.2 are exceeded by more than 5 dB and cannot be mitigated, a 5 dB positive adjustment to measured/predicted A-weighted levels applies for the evening/night period.

Hence, where relevant throughout each survey the operator has estimated the difference between site 'C-weighted' and site 'A-weighted' noise emission levels by matching audible sounds with the response of the analyser ( $L_{Ceq}-L_{Aeq}$ ). Where this was deemed to be 15 dB or greater, the measured one-third octave frequencies have been compared to the values in Table 3.2 to identify the relevant modifying factor correction (if applicable). This method has been applied to this assessment as presented in Section 5.

It is of note that the NPfl (EPA 2017) states that low-frequency noise corrections only apply under the standard or noise-enhancing (i.e. applicable) meteorological conditions.

# 4 Assessment methodology

## 4.1 Attended noise monitoring

To quantify noise emissions from Ashton Coal, 15-minute attended noise monitoring surveys were completed at representative locations as per the approved NMP.

Noise monitoring locations as per the NMP and their coordinates are listed in Table 4.1 and are shown in Figure 4.1.

**Table 4.1** Attended noise monitoring locations



Monitoring location	Description	MGA56	
		Easting	Northing
N2	Camberwell Village (west)	320297	6405670
N3	Camberwell Village (north east)	320554	6405839
N4	South of New England Highway	319776	6404101

Attended noise monitoring is scheduled to be “unannounced” and to EMM’s knowledge Ashton Coal were not aware of the monitoring prior to its commencing. Noise monitoring is avoided during any scheduled down-time or major maintenance. To our knowledge, regular operations were occurring during this round of noise monitoring.

Where possible throughout each survey, the operator has quantified the contribution of each significant noise source. This was done by matching audible sounds with the response of the analyser (where applicable) and/or via post-analysis of data (e.g. low pass filtering).

## 4.2 Instrumentation

A Svantek 979 Type 1 sound analyser (s/n 21095) was used to conduct 15-minute attended measurements and record 1/3 octave frequency and statistical noise indices. The sound analyser was calibrated before and on completion of the survey using a Rion NC-74 calibrator (s/n 34372752). The instrumentation’s calibration certificates are provided in Appendix C.

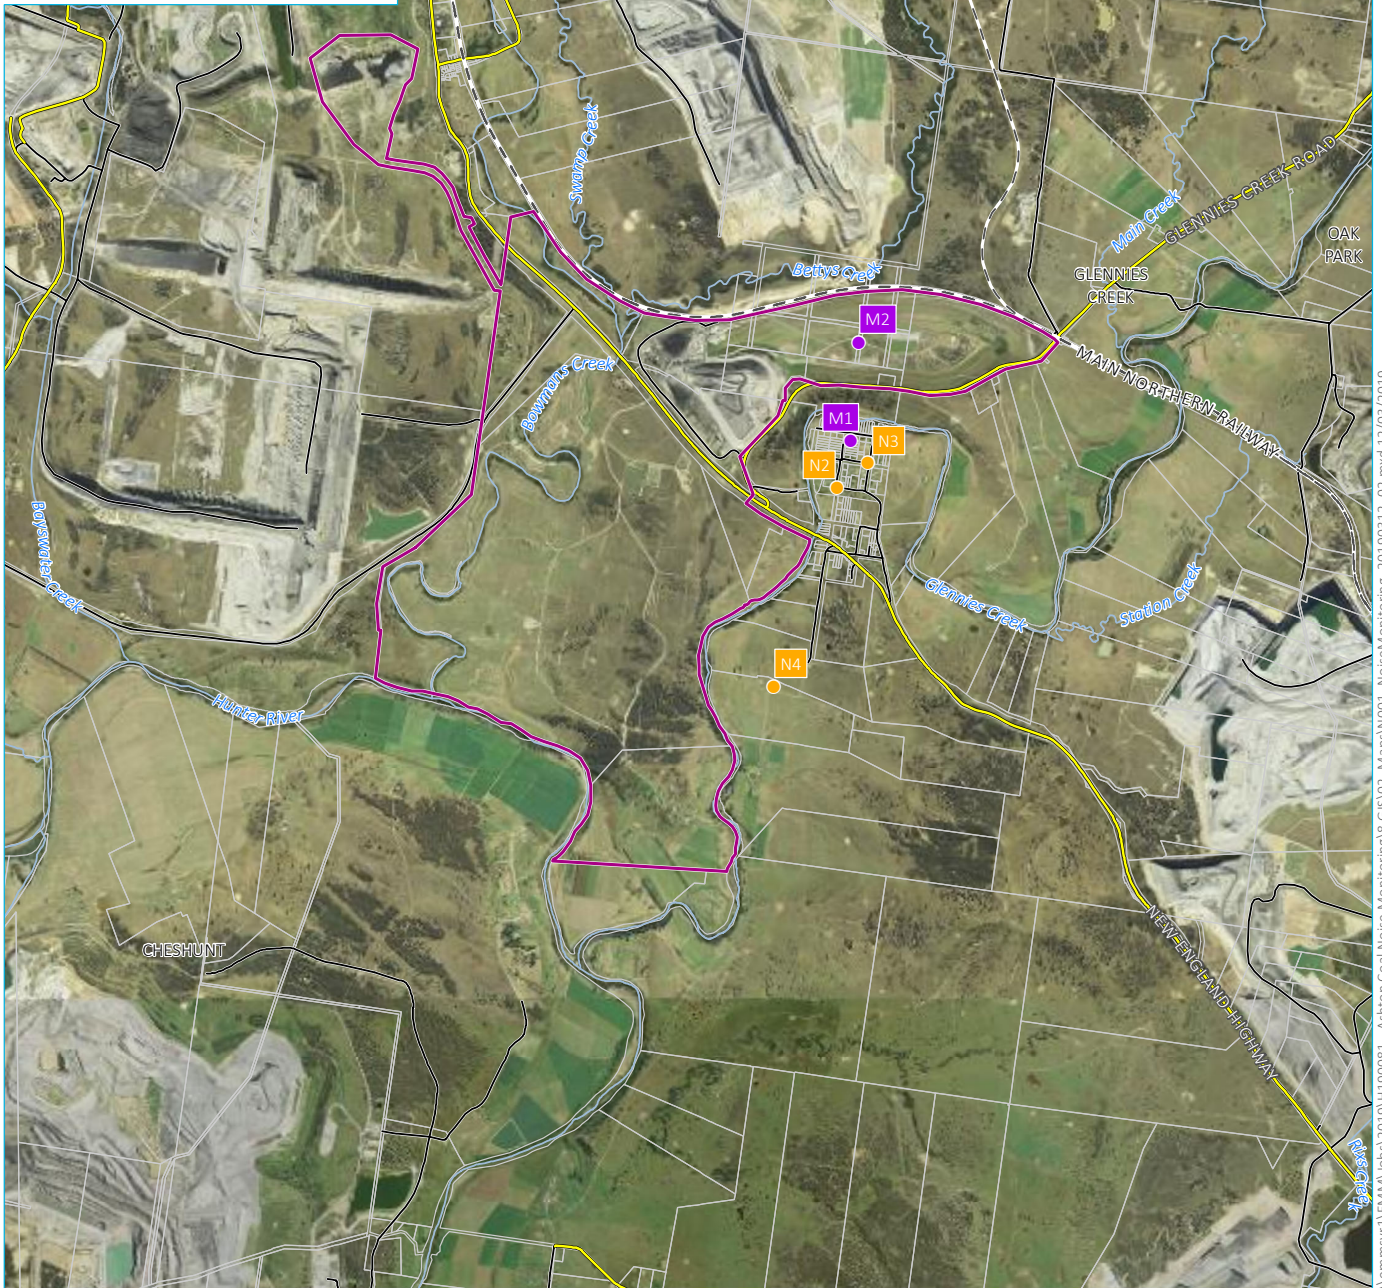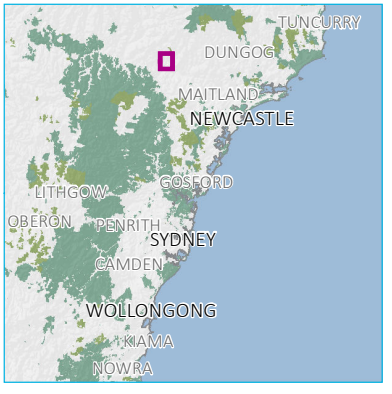

Source: EMM (2019); DFSI (2017); GA (2011)



**KEY**

- Site boundary
- Noise monitoring location
- Meteorological station
- Rail line
- Main road
- Local road
- Watercourse/drainage line
- Cadastral boundary

Noise monitoring locations and Ashton colliery boundary

Ashton Coal  
Monthly attended noise monitoring  
Figure 4.1

\\emmsvr1\EMM\lobbs\2019\H\190081 - Ashton Coal Noise Monitoring\GIS\02\_Maps\N001\_NoiseMonitoring\_20190312\_02.mxd 12/03/2019

### 4.3 Attended noise monitoring exceedance procedure

Ashton Coal has developed an attended monitoring exceedance procedure that is to be implemented if measurements show Ashton Coal noise emissions are above the relevant noise criteria. This response plan is implemented if site noise levels are determined to be above the relevant noise criteria and when noise limits are applicable due to suitable meteorological conditions. The following noise management initiatives are implemented:

- Consultant will record the reading and advise Ashton Coal of the exceedance. Ashton Coal will implement remedial action as required;
- A follow up measurement is to be conducted (within 75 minutes after the first measurement and no earlier than 10 pm)
- If the follow up measurement indicates that site noise levels are above the relevant noise criteria and when noise limits are applicable, the consultant will record the result, note the site has failed and is deemed a 'noise affected night' at that location. An additional monitoring test should be scheduled to be undertaken at the same location within one week and move on to the next monitoring location.
- If the follow up measurement indicates that site noise levels are below the relevant noise criteria and when noise limits are applicable, the consultant will record the result, note the site has passed, schedule an additional monitoring test to be undertaken at the location within one week and move on to the next monitoring location.

### 4.4 Determination of stability category

This assessment determined the stability categories throughout the attended monitoring period using the direct measurement method as per Appendix E2 of the INP (EPA 2000).

The temperature lapse rate between the two weather stations (M1 – Sentinex Unit 40 located in Camberwell Village and M2 – Ashton Coal 'repeater' meteorological station located in the north eastern open cut (NEOC) area) was calculated using the following formula:

$$\text{Temperature lapse rate} = (\Delta T) \times (100/(\Delta H))$$

Where:

- $\Delta T$  = temperature measured at M2 (at 10 metres above ground level) minus temperature measured at M1 (at 10 metres above ground level); and
- $\Delta H$  = the vertical height difference between M2 and M1 (equal to 73 metres).

Table E5 of the INP (EPA 2000) is reproduced in Table 4.2 and presents the stability categories and associated ranges in temperature lapse rates.

**Table 4.2**      **Stability categories and temperature lapse rates**

Stability category	Temperature lapse rate ( $\Delta T$ ) ( $^{\circ}\text{C}/100\text{ m}$ )
A	$\Delta T < -1.9$
B	$-1.9 \leq \Delta T < -1.7$
C	$-1.7 \leq \Delta T < -1.5$
D	$-1.5 \leq \Delta T < -0.5$
E	$-0.5 \leq \Delta T < 1.5$
F	$1.5 \leq \Delta T < 4.0$
G	$\Delta T \geq 4.0$

Source: INP (EPA 2000).

Other meteorological data, such as wind speed, has been sourced directly from meteorological station M2.



# 5 Review of data and discussion

## 5.1 Summary

Results of attended noise measurements are summarised in Table 5.1. Ashton Coal contribution and total mine noise were determined for each survey using in-field observations and post-analysis of data as required (e.g. removing higher frequencies that are not mine related i.e. above 630 Hz). Attended monitoring was completed on 14 March 2019.

The meteorological data for the monitoring period was sourced from Ashton Coal's two weather stations (M1 and M2) to determine applicability of criteria in accordance with the DC and EPL. Noise limits were not applicable during one of the three measurements (at location N4) due to the presence of winds at speeds greater than 3 m/s at the time of the measurement.

Low frequency noise was conservatively assessed by comparison of the total measured one-third octave  $L_{Aeq}$  noise levels to the NPfI one-third octave low-frequency noise thresholds. Measured noise levels did not exceed the relevant LFN thresholds during any of the measurements. Therefore, in accordance with the NPfI, LFN modifying factors were found to be not relevant and hence were not applied to estimated site noise levels at any of the locations.

Monitoring identified that site noise was inaudible at all three monitoring locations. Typically, when a particular source is not audible above local ambient noise levels, the likely contribution of that source is generally at least 10 dB below the measured background ( $L_{A90}$ ) level.

**Table 5.1 Ashton Coal attended noise monitoring results – March 2019**

Location	Date	Start time	Total noise levels, dB							Site contributions, dB			Noise limits, dB		Meteorological conditions <sup>3</sup> limits apply (Y/N)	Exceedance, dB	Comments
			L <sub>Amin</sub>	L <sub>A90</sub>	L <sub>Aeq</sub>	L <sub>A10</sub>	L <sub>A1</sub>	L <sub>Amax</sub>	L <sub>Ceq</sub>	LFN mod. factor <sup>1</sup>	L <sub>Aeq</sub>	L <sub>Amax</sub> <sup>2</sup>	L <sub>Aeq</sub>	L <sub>Amax</sub> <sup>2</sup>			
N2	14/3	22:00	34	38	54	52	66	79	60	Nil	IA	IA	36	46	2.1 m/s @ 149 D class stability -0.7°C/100m VTG Y	Nil	Site noise inaudible. Neighbouring mine, traffic on the New England Highway and insects consistently audible. Dog barking frequently audible. Livestock occasionally audible.
N3	14/3	22:17	33	37	43	47	51	54	58	Nil	IA	IA	36	46	2.4 m/s @ 181 E class stability -0.1°C/100m VTG Y	Nil	Site noise inaudible. Neighbouring mine, traffic on the New England Highway and insects consistently audible. Trains on the main line (unrelated to Ashton Coal) frequently audible. Bird noise and bat noise occasionally audible. Trains horns (unrelated to Ashton Coal) briefly audible.
N4	14/3	22:41	35	37	39	41	43	58	65	Nil	IA	IA	36	46	4.2 m/s @ 171 D class stability -1.2°C/100m VTG N	N/A	Site noise inaudible. Traffic on the New England Highway, insects and powerline hum consistently audible. Neighbouring mine, aircraft noise, wind in trees and distant dogs barking occasionally audible. Trains horns (unrelated to Ashton Coal) and livestock briefly audible.

- Notes:
1. Modifying factor correction for low frequency noise in accordance with Fact Sheet C of the NPfI (refer Section 3.3).
  2. For assessment purposes the L<sub>Amax</sub> and the L<sub>A1,1 minute</sub> are interchangeable.
  3. Meteorological data were taken as an average over 15 minutes from the Ashton Coal weather station (Refer to Section 5.1).
  4. IA = inaudible.
  5. N/A = not applicable.

## 5.2 N2 - Camberwell Village (west)

Ashton Coal operations were inaudible during the whole of the operator-attended noise survey. Given this and the measured background noise level of  $L_{A90}$  38 dB, Ashton Coal  $L_{Aeq,15\text{ minute}}$  noise contributions complied with the noise limits. Other ambient noise sources included neighbouring mines, insects, traffic on the New England Highway, dogs barking and livestock noise.

Neighbouring mining operations were consistently audible during the operator-attended noise survey at monitoring location N2. The total cumulative mine noise contribution was estimated to be  $L_{Aeq,night} < 28$  dB ( $L_{Aeq,15\text{ minute}} < 31$  dB - 3 dB as per NPfI methodology) which is below the cumulative mine noise night-time criterion (i.e.  $L_{Aeq,night}$  40 dB). Therefore, the total cumulative mine  $L_{Aeq,night}$  noise contribution was likely to be below the cumulative mine noise criterion.

## 5.3 N3 - Camberwell Village (north east)

Ashton Coal operations were inaudible during the whole of the operator-attended noise survey. Given this and the measured background noise level of  $L_{A90}$  37 dB, Ashton Coal  $L_{Aeq,15\text{ minute}}$  noise contributions complied with the noise limits. Other ambient noise sources included neighbouring mines, insects, traffic on the New England Highway, bird noise, bat noise, livestock noise, train horns and trains on the main line (unrelated to Ashton Coal).

Neighbouring mining operations were consistently audible during the operator-attended noise survey at monitoring location N3. The total cumulative mine noise contribution was estimated to be  $L_{Aeq,night} < 29$  dB ( $L_{Aeq,15\text{ minute}} < 32$  dB - 3 dB as per NPfI methodology) which is below the cumulative mine noise night-time criterion (i.e.  $L_{Aeq,night}$  40 dB). Therefore, the total cumulative mine  $L_{Aeq,night}$  noise contribution was likely to be below the cumulative mine noise criterion.

## 5.4 N4 - South of New England Highway

Ashton Coal operations were inaudible during the whole of the operator-attended noise survey. Given this and the measured background noise level of  $L_{A90}$  37 dB, Ashton Coal  $L_{Aeq,15\text{ minute}}$  noise contributions complied with the noise limits, had they applied. Other ambient noise sources included a neighbouring mine, traffic on the New England Highway, power line hum, livestock noise, aircraft noise, wind in trees, dogs barking and train horns (unrelated to Ashton Coal).

Neighbouring mining operations were occasionally audible during the operator-attended noise survey at monitoring location N4. The total cumulative mine noise contribution was estimated to be  $L_{Aeq,night} < 22$  dB ( $L_{Aeq,15\text{ minute}} < 25$  dB - 3 dB as per NPfI methodology) which is below the cumulative mine noise night-time criterion (i.e.  $L_{Aeq,night}$  40 dB). Therefore, the total cumulative mine  $L_{Aeq,night}$  noise contribution was likely to be below the cumulative mine noise criterion had it been applicable.

## 6 Conclusion

EMM has completed a review of mine noise from Ashton Coal within the surrounding community based on attended measurements conducted on 14 March 2019.

The applicability of noise limits was assessed with reference to Ashton Coal's two meteorological stations (M1 and M2) located to the east of the site. Noise limits were not applicable during one of the three measurements (at location N4) due to the presence of wind speeds greater than 3 m/s at the time of the measurement.

The assessment of noise contributions from site included consideration of modifying factors for noise characteristics where relevant and in accordance with the INP.

Ashton Coal noise contributions and cumulative mine noise contributions were below (satisfied) the relevant noise limits at all monitoring locations for this round of monitoring.

# References

Ashton Coal Noise Management Plan, 2017.

NSW Department of Planning and Environment, Development Consent DA309-11-2001-I, 2016.

NSW Environment Protection Authority, Environment Protection License 11879.

NSW Environment Protection Authority, Industrial Noise Policy, 2000.

NSW Environment Protection Authority, Industrial Noise Policy Application notes, 2017.

NSW Environment Protection Authority, Noise Policy for Industry, 2017.

---

Appendix A

# Project approval extract

---

## APPENDIX 6 ALTERNATE NOISE CONDITIONS

### NOISE

#### Application

- Conditions 2 to 3 below have effect during times when open cut mining operations are not being undertaken at the Ashton Mine Complex, in the opinion of the Secretary.

#### Noise Criteria

- Except for the noise-affected land in Table 1 of Schedule 3, the Applicant must ensure that the noise generated by the development does not exceed the criteria in Table 1 at any residence on privately-owned land or on more than 25 per cent of any privately-owned land.

Table 1: Noise Criteria dB(A)

Receiver No.	Receiver	Day ( $L_{Aeq}$ (15min))	Evening ( $L_{Aeq}$ (15min))	Night ( $L_{Aeq}$ (15min))	Night ( $L_{A1}$ (1 min))
-	All privately-owned land	38	38	36	46

Noise generated by the development is to be measured in accordance with the relevant requirements of the *NSW Industrial Noise Policy*. Appendix 8 sets out the requirements for evaluating compliance with these criteria.

However, these noise criteria do not apply if the Applicant has an agreement with the relevant owner/s of the residence/land to generate higher noise levels, and the Applicant has advised the Department in writing of the terms of this agreement.

#### Additional Noise Mitigation Measures

- Upon receiving a written request from the owner of any residence on any privately-owned land where subsequent operational noise monitoring shows the noise generated by the development exceeds the noise limits in Table 2, the Applicant must implement additional reasonable and feasible noise mitigation measures (such as double glazing, insulation, and/or air conditioning) at the residence in consultation with the owner.

If within 3 months of receiving this request from the landowner, the Applicant and the landowner cannot agree on the measures to be implemented, or there is a dispute about the implementation of these measures, then either party may refer the matter to the Secretary for resolution.

Table 2: Additional Noise Mitigation Criteria dB(A)  $L_{Aeq}$  (15min)

Receiver No.	Receiver	Day ( $L_{Aeq}$ (15min))	Evening ( $L_{Aeq}$ (15min))	Night ( $L_{Aeq}$ (15min))
-	All privately-owned land	38	38	38

#### Notes:

- Noise generated by the development is to be measured in accordance with the relevant requirements of the *NSW Industrial Noise Policy*. Appendix 8 sets out the requirements for evaluating compliance with these criteria.
- For this condition to apply, the exceedance of the criteria must be systemic.

## **APPENDIX 8 NOISE COMPLIANCE ASSESSMENT**

### **Compliance Monitoring**

1. Attended monitoring is to be used to evaluate compliance with the relevant conditions of this approval.
2. Data collected for the purposes of determining compliance with the relevant conditions of this approval is to be excluded under the following meteorological conditions:
  - a) during periods of rain or hail;
  - b) average wind speed at microphone height exceeds 5 m/s;
  - c) wind speeds greater than 3 m/s measures at 10 m above ground level; and
  - d) temperature inversion conditions greater than 3°C/100m.
3. Unless otherwise agreed with the Secretary, this monitoring is to be carried out in accordance with the relevant requirements relating for reviewing performance set out in the NSW Industrial Noise Policy (as amended from time to time), in particular the requirements relating to:
  - a) monitoring locations for the collection of representative noise data;
  - b) equipment used to collect noise data, and conformity with Australian Standards relevant to such equipment; and
  - c) modifications to noise data collected, including for the exclusion of extraneous noise and/or penalties for modifying factors apart from adjustments for duration.
4. To the extent that there is any inconsistency between the Industrial Noise Policy and the requirements set out in this Appendix, the Appendix prevails to the extent of the inconsistency.

### **Determination of Meteorological Conditions**

5. Except for wind speed at microphone height, the data to be used for determining meteorological conditions shall be that recorded by the meteorological station located in the vicinity of the site (as required by condition 18 of Schedule 3).



---

Appendix B

## EPL extract

---

# Environment Protection Licence

Licence - 11879



3	Ambient surface water monitoring	In Bowmans Creek near the New England Highway shown as point SM4 in Figure 4 dated 8/8/03 titled "EPA Surface Water Monitoring Sites"
4	Ambient surface water monitoring.	In Bowmans Creek near the proposed longwall panels shown as point SM5 in Figure 4 dated 8/8/03 titled "EPA Surface Water Monitoring Sites"
5	Ambient surface water monitoring	In Bowmans Creek at the Hunter River confluence shown as point SM6 in Figure 4 dated 8/8/03 titled "EPA Surface Water Monitoring Sites"
6	Ambient surface water monitoring.	In the Hunter River upstream of Bowmans Creek shown as point SM9 on Figure 4 dated 8/8/03 titled "EPA Surface Water Monitoring Sites".
7	Ambient surface water monitoring	In the Hunter River downstream of Bowmans Creek confluence shown as point SM10 on Figure 4 dated 8/8/03 titled "EPA Surface Water Monitoring Sites".
8	Groundwater monitoring	Locations shown on Figure 1A titled "Groundwater Monitoring Piezometer Locations for EPL" dated 26/10/06.

## 3 Limit Conditions

### L1 Pollution of waters

L1.1 Except as may be expressly provided in any other condition of this licence, the licensee must comply with section 120 of the Protection of the Environment Operations Act 1997.

### L2 Noise limits

L2.1 Noise from the premises must not exceed the limits specified in the table below:

Location	Day LAeq(15 minute)	Evening LAeq(15 minute)	Night LAeq(15 minute)	Night LAeq(1 minute)
----------	---------------------	-------------------------	-----------------------	----------------------

# Environment Protection Licence



Licence - 11879

Any residence not owned by the licensee or not subject to an agreement between the licensee and the residence owner as to an alternative noise limit.	38	38	36	46
---	----	----	----	----

- L2.2 For the purpose of Condition L2.1:
- Day is defined as the period from 7am to 6pm Monday to Saturday and 8am to 6pm Sundays and Public Holidays,
  - Evening is defined as the period from 6pm to 10pm, and
  - Night is defined as the period from 10pm to 7am Monday to Saturday and 10pm to 8am Sundays and Public Holidays
- L2.3 Noise from the premises must be measured at the most affected point on or within the residential boundary or at the most affected point within 30m of the dwelling where the dwelling is more than 30m from boundary to determine compliance with the LAeq(15 minute) noise limits in condition L2.1. Where it can be demonstrated that direct measurement of noise from the premises is impractical, the EPA may accept alternative means of determining compliance. See Chapter 11 of the NSW Industrial Noise Policy. The modification factors presented in Section 4 of the NSW Industrial Noise Policy shall also be applied to the measured noise level where applicable.
- L2.4 Noise from the premises is to be measured or computed at 1m from the dwelling facade to determine compliance with condition L2.1 (LA1 (1 minute) noise limit).
- L2.5 The noise emission limits identified in condition L2.1 apply under the following meteorological conditions:
- wind speeds up to 3m/s at 10m above ground level; and
  - temperature inversion conditions up to 30C/100m.
- L2.6 Open cut mining activities must only be carried out between the hours of 0700 and 2200 Monday to Saturday, and 0800 and 2200 on Sundays and Public Holidays.
- L3 Blasting**
- L3.1 Blasting in or on the premises must only be carried out between 0900 hours and 1700 hours, Monday to Saturday. Blasting in or on the premises must not take place on Sundays or Public Holidays without the prior approval of the EPA.
- L3.2 The overpressure level from blasting operations carried out in or on the premises must not:
- exceed 115 dB(L) for more than 5% of the total number of blasts carried out on the premises within the 12 months annual reporting period; and
  - exceed 120 dB(L) at any time at any residence or noise sensitive location (such as a school or hospital) that is not owned by the licensee or subject to a private agreement between the owner of the residence or noise sensitive location

---

Appendix C

# Calibration certificates

---

# CERTIFICATE OF CALIBRATION

CERTIFICATE NO.: **SLM 22926 & FILT 4696**

**Equipment Description:** Sound & Vibration Analyzer

**Manufacturer:** Svantek

**Model No:** Svan-979      **Serial No:** 21095

**Microphone Type:** 40AE      **Serial No:** 120711

**Preamplifier Type:** SV17      **Serial No:** 25110

**Filter Type:** 1/3 Octave      **Serial No:** 21095

**Comments:** All tests passed for class 1.  
(See over for details)

**Owner:** EMGA Mitchell McLennan  
Ground Floor, Suite 01, 20 Chandos St  
St Leonards NSW 2065

**Ambient Pressure:** 999 hPa  $\pm 1.5$  hPa

**Temperature:** 23 °C  $\pm 2^\circ$  C      **Relative Humidity:** 35%  $\pm 5\%$

**Date of Calibration:** 14/06/2018      **Issue Date:** 15/06/2018

**Acu-Vib Test Procedure:** AVP10 (SLM) & AVP06 (Filters)


**CHECKED BY:** *[Signature]*

**AUTHORISED SIGNATURE:** *[Signature]*  
*Jack Kieft*

Accredited for compliance with ISO/IEC 17025 - Calibration  
The results of the tests, calibration and/or measurements included in this document are traceable to Australian/national standards.



Accredited Lab. No. 9262  
Acoustic and Vibration  
Measurements

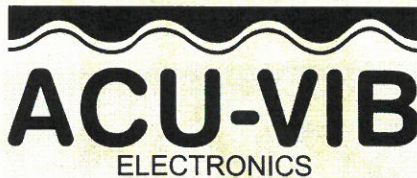

**HEAD OFFICE**  
Unit 14, 22 Hudson Ave. Castle Hill NSW 2154  
Tel: (02) 96808133      Fax: (02) 96808233  
Mobile: 0413 809806  
web site: www.acu-vib.com.au

# CERTIFICATE OF CALIBRATION

CERTIFICATE NO: 24147

**EQUIPMENT TESTED:** Sound Level Calibrator

**Manufacturer:** Rion  
**Type No:** NC-74                      **Serial No:** 34372752  
**Owner:** EMM Consulting  
20 Chandos Street  
St Leonards NSW 2065

**Tests Performed:** Measured output pressure level was found to be:

Parameter	Pre-Adj	Adj Y/N	Output: (db re 20 µPa)	Frequency: (Hz)	THD&N (%)
Level 1:	NA	N	94.10	1002.70	2.24
Level 2:	NA	N	NA	NA	NA
<b>Uncertainty:</b>			±0.11 dB	±0.05%	±0.20 %
Uncertainty (at 95% c.l.) k=2					

**CONDITION OF TEST:**

**Ambient Pressure:** 991 hPa ±1.5 hPa    **Relative Humidity:** 45% ±5%

**Temperature:** 23 °C ±2° C

**Date of Calibration:** 13/02/2019                      **Issue Date:** 13/02/2019


**Acu-Vib Test Procedure:** AVP02 (Calibrators)

**Test Method:** AS IEC 60942 - 2017


**CHECKED BY:** *[Signature]*    **AUTHORISED SIGNATURE:** *[Signature]*  
*Jack Kielt*

.Accredited for compliance with ISO/IEC 17025 - Calibration  
The results of the tests, calibration and/or measurements included in this document are traceable to Australian/national standards.

The uncertainties quoted are calculated in accordance with the methods of the ISO Guide to the Uncertainty of Measurement and quoted at a coverage factor of 2 with a confidence interval of approximately 95%.



Accredited Lab. 9262  
Acoustic and Vibration  
Measurements

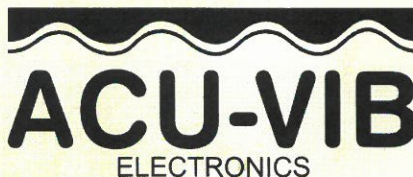

**HEAD OFFICE**  
Unit 14, 22 Hudson Ave. Castle Hill NSW 2154  
Tel: (02) 96808133 Fax: (02)96808233  
Mobile: 0413 809806  
Web site: www.acu-vib.com.au

